

BREMSKERL 5396

Material description

magnetic components, flexible, grey-black, Rubber-resin-bonded, asbestos-free

Availability

in rolled form up to 10 m length, Wire Mesh Backing

Applications

Brakes and clutches for usual mechanical engineering, disc brake pad for rail vehicles, Crane standard covering

Technical Data

mean friction coefficient μ (dry) for design purposes	0,35
recommended range of performance:		
p max [N/cm ²]	200
v max [m/s]	30
Max. application temperature [°C]		
continuously	250
intermittently	450
Hardness at 20°C	ISO 2039-1 [N/mm ²]	approx. 45
Tensile strength at 20°C	ISO 527 [MPa]	approx. 5
Impact strength at 20°C	DIN 179-1 [kJ/m ²]	approx. 10
Specific weight	DIN 53479 [g/cm ³]	2,3
Bondability	good

Not tested for oil-immersed applications, occasional splashes not detrimental


The maximum pressure / temperature / speed should not occur simultaneously. This information is advisory and is to our best knowledge. All the physical properties shown above are mean values.

BREMSKERL


Der Spezialist für Brems- und Kupplungsbeläge
The specialist for brake and clutch linings




Friction characteristics

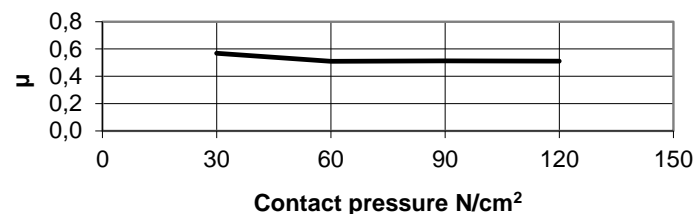


$v = 6$ m/s
 $T = 150^\circ\text{C}$

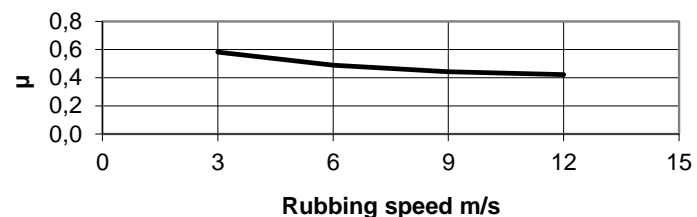

$p = 60$ N/cm²
 $T = 150^\circ\text{C}$

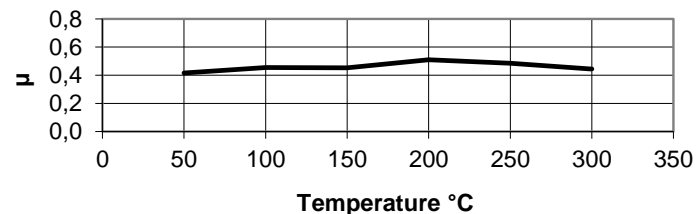

Continuous braking
 $v = 6$ m/s
 $p = 60$ N/cm²

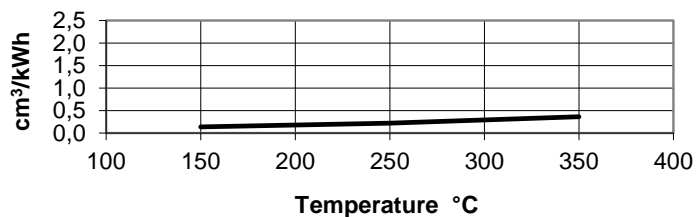

spec. wear rate
 $v = 15$ m/s
 $p = 50$ N/cm²

Test conditionen: sample size: 2x5 cm², counter material: EN-GJL-250, disc brake

The friction coefficients determined by small-scale brake lining tests may not be compatible to practice and further tests may be required.