



BREMSKERL



08/2025

BREMSKERL 7000

Range of Application

Disc brake pad for rail vehicles up to 220km/h | Standard disc brake pad material for medium loads | UIC - Passenger coaches

Material description

Organic composite formulation brake pad material | Containing metal fibres | Free of asbestos | Heavy metal free

Other Characteristics

Minimised odour | Excellent wet performance | UIC - approved
Fire protection certificate acc. EN 45545-2 (R22/R23; HL1, HL2, HL3)


TECHNICAL DATA

Average coefficient of friction (dry)	0.37	
Average pad wear	0.17 cm ³ /MJ	
Hardness	42 N/mm ²	DIN EN ISO 2039-1
Tensile Strength	3.8 MPa	DIN EN ISO 527
Impact Strength	4.3 kJ/m ²	DIN EN ISO 179-1
Density	2 g/cm ³	DIN EN ISO 1183

CAPACITY

max. specific pressure	105 N/cm ²
max. sliding speed	60 m/s
max. continuous application temperature	370 °C
max. short time application temperature	460 °C

FRICTION CHARACTERISTICS

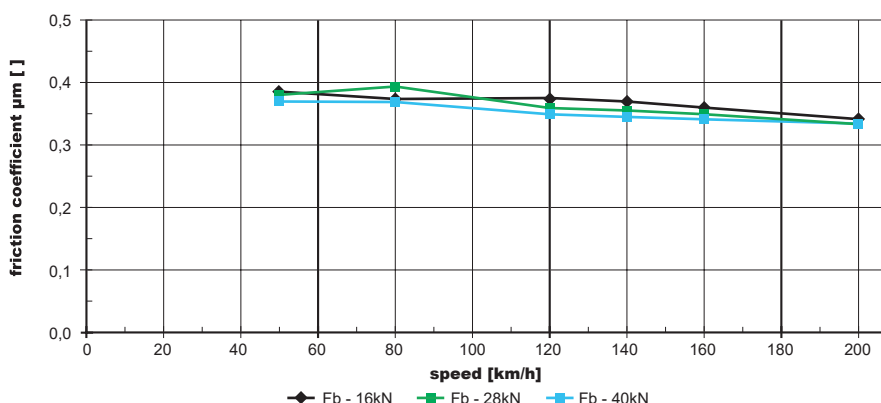

BREMSKERL-REIBBELAGWERKE

EMMERLING GMBH & CO. KG

BRAKENHOF 7 • 31629 Estorf • Germany

+ 49 (0) 5025 978-0

info@bremskerl.com

www.bremskerl.com



Management System
ISO 9001:2015
ISO 14001:2015
ISO 50001:2018
www.tuv.com
ID 0091005970

