



BREMSKERL

BK

R502



BREMSKERL R502

Sintered brake pads for rail vehicles up to 200 km/h and 10 t

- Material:** Sintered composite formulation
Contains metal | Asbestos free | Heavy metal free
- Availability:** Customer specific shapes
- Applications:** Electrical Multiple Units (EMU) | Diesel Multiple Units (DMU)
UIC approved



BREMSKERL




TECHNICAL DATA

Average coefficient of friction (dry)	0.35	
Recommended range performance:		
max. specific pressure	1 N/mm ²	
max. sliding speed	40 m/s	
Melting temperature	> 1000 °C	
Hardness at 20°C	approx. 130 N/mm ²	DIN EN ISO 2039-1
Specific weight	5.25 g/m ²	

FRICTION CHARACTERISTICS

Test programme: Tab C.6; Nr. T1 class 4.3 acc. UIC 541-3

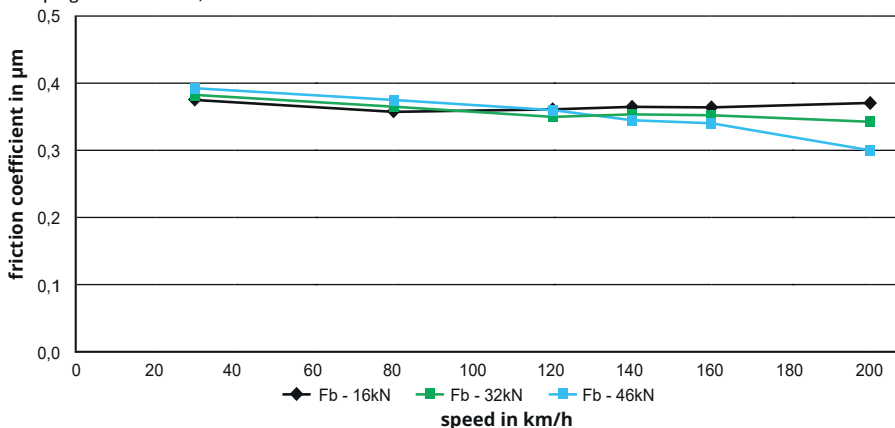

07/2026

BREMSKERL-REIBBELAGWERKE
EMMERLING GMBH & CO. KG
Brakenhof 7 • 31629 Estorf • Germany

+ 49 (0) 5025 978-0
info@bremskerl.com
www.bremskerl.com

